

The Rock™ Brillouin Laser System

Features


-
-
-
-
-
-
-
-
-
-
-

Mechanical Outline:

PRODUCT SPECIFICATIONS

Parameter	Values
Wavelength Range	1530–1565 nm
Output Power	25 mW
Longitudinal Mode	Single Frequency
Wavelength Accuracy	50 MHz
Spectral Line Width	~ 200 Hz
Relative Intensity Noise (RIN) @ Peak ~ 1 MHz	< -120 dB/Hz
Relative Intensity Noise (RIN) > 50 MHz	< 155 dB/Hz
Signal to ASE Noise Ratio (50 pm, bandwidth)	> 65 d
Side Mode Suppression Ratio (SMSR)	> 50 d
Polarization Extinction Ratio (PER)	> 25 B
Tuning Range	30 GHz
Power Stability over Hours	± 2%
Connectors	FC/APC
Package Dimension	471 x 362 x 204 mm

Ordering Example: BRFLS-25-1-1550.XX = Brillouin Rock Fiber Laser System, 25 mW output power, tuning, with a wavelength at 1550.XX nm.

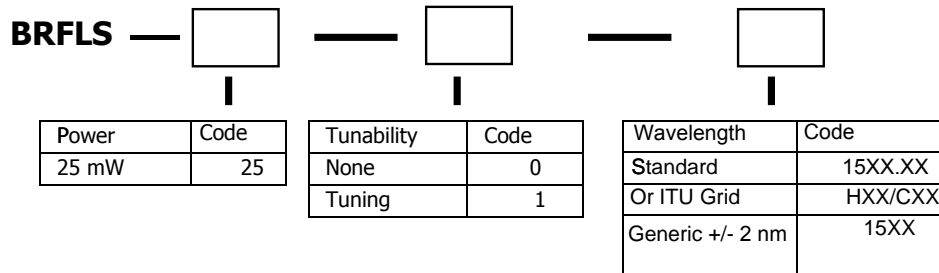

NP Photonics Rock Fiber Laser Sources are protected by a 12-month warranty. All components and assemblies are unconditionally warranted to be free of defects in workmanship and materials for the warranty period, beginning from the date of shipment. This warranty is in lieu of all other warranties, expressed or implied, and does not cover incidental or consequential loss. This warranty does not apply to devices damaged due to operating conditions outside of the specified parameters. Modified warranties for OEM customers are available.



NP Photonics, Inc.
 9030 S. Rita Road, Suite 120 - Tucson, AZ 85747 - USA
 Phone: 520-799-7400 Fax: 520-799-7403
 E--mail: info@np Photonics.com www.npphotonics.com

Specifications subject to change without notice. 08-09 Rev. 4